




# iHome iH5 Charging Dock Replacement

How to properly remove and replace the iHome iH5 charging

Written By: Dustin Lamb

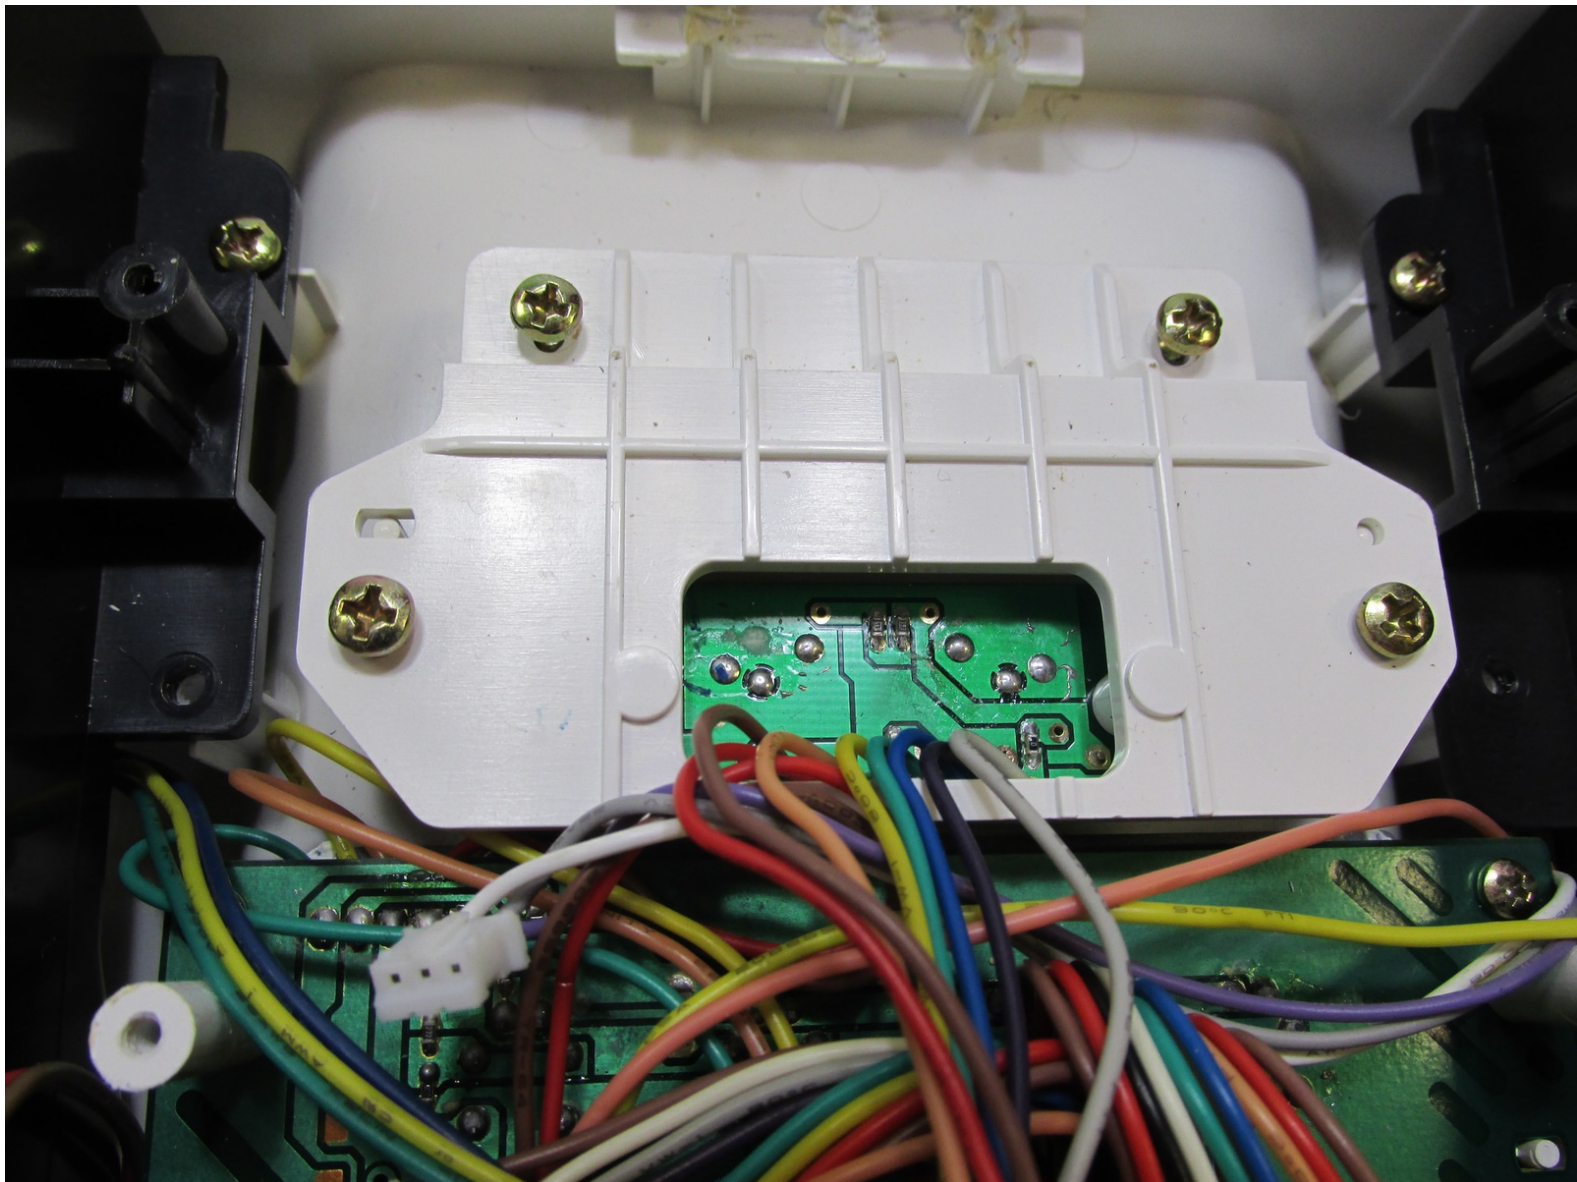

## INTRODUCTION


This is a replacement guide for the charging dock on the iHome iH5.

---

### **TOOLS:**


- [Phillips #2 Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Charging Dock

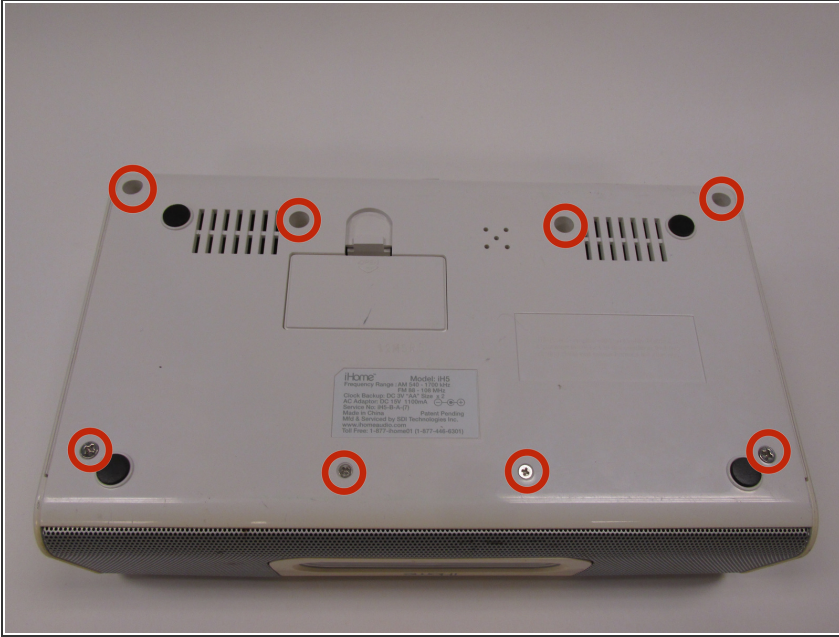

- Remove the eight 5/16 inch screws with a #2 Phillips screwdriver.


## Step 2

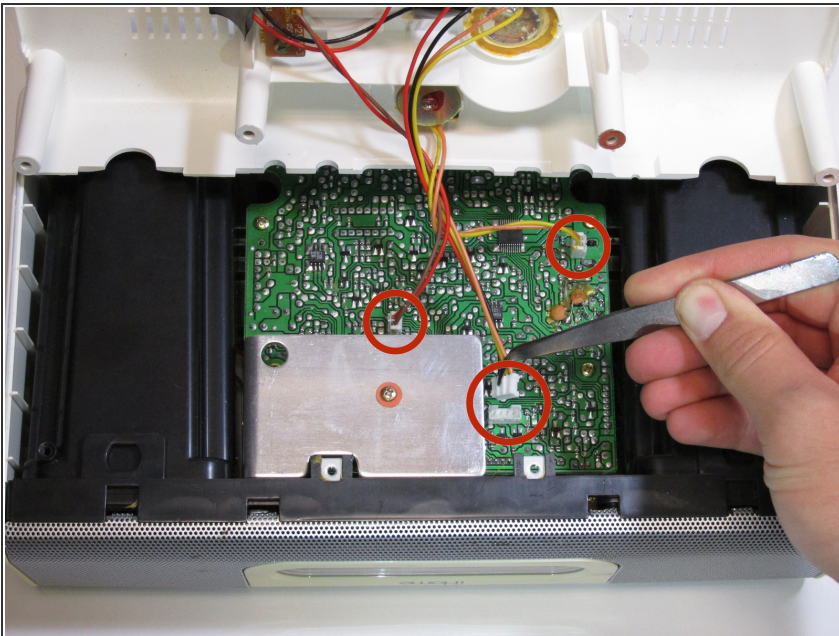

- Use tweezers to unplug the three wires connected to the circuit board. If the wires are tight pliers might work better.





## Step 3

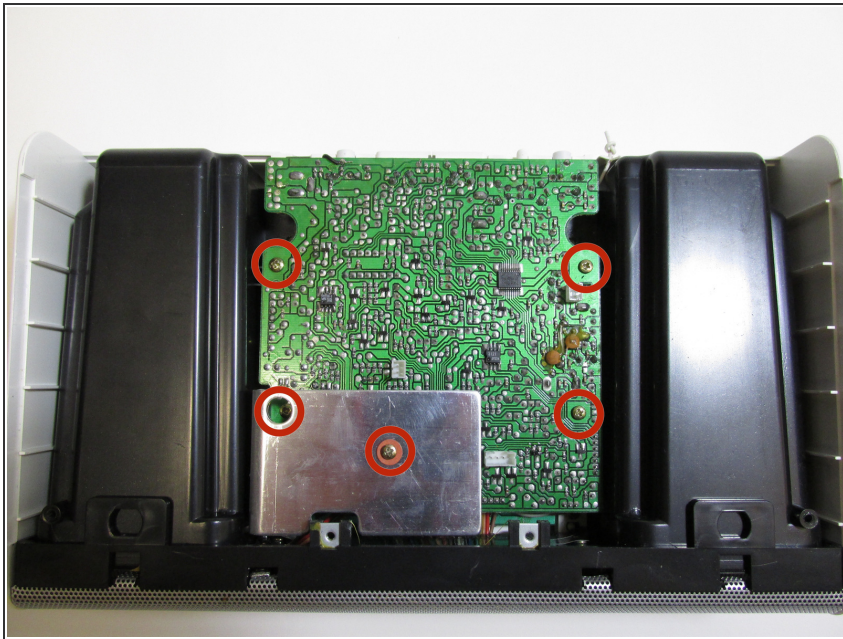

- Remove the five 5/16 inch screws from the circuit board.

## Step 4

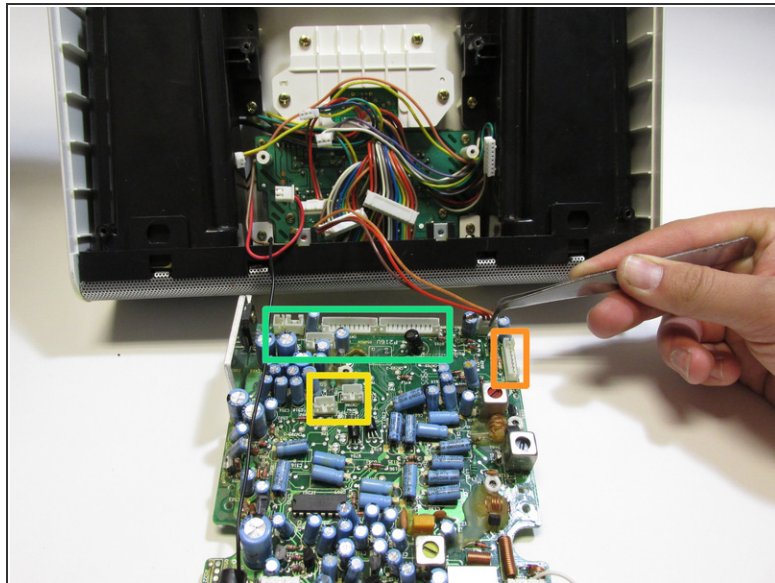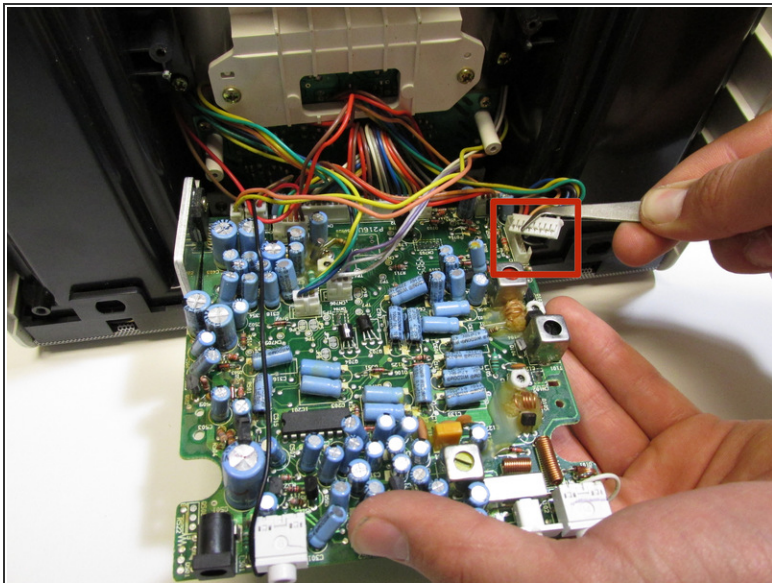


- Flip the circuit board over.

⚠ There are capacitors all over the back side of the board. Be careful not to touch these capacitors (blue cylinders) as they can discharge—giving you a shock.


- Unplug the eight wires attached to the circuit board with tweezers. If the wires are tight pliers might work better.
  - There is one wire in the orange box.
  - There are two wires in the yellow box.
  - There are five wires in the green box.

## Step 5

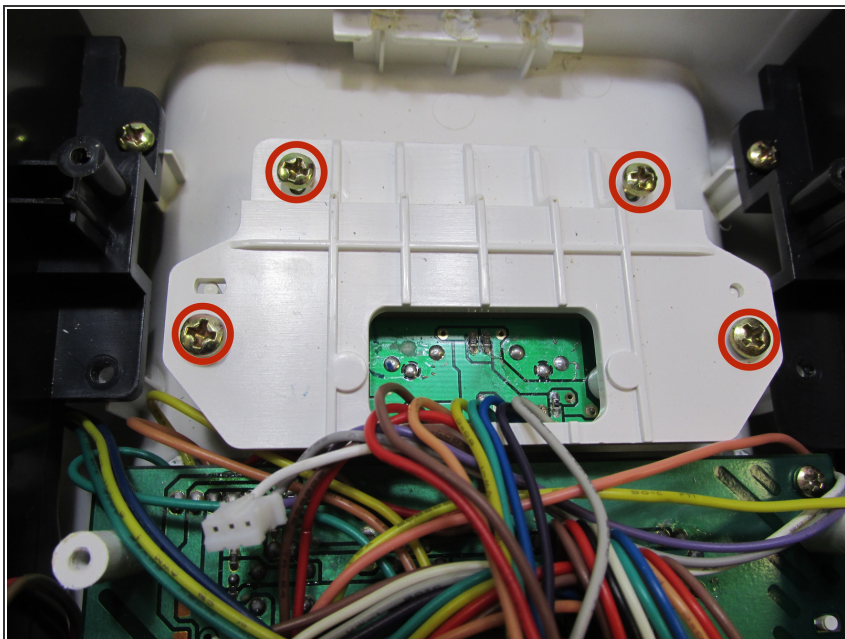

- Remove the following four screws securing the iHome iH5 charging dock.
- Use a #2 Phillips screwdriver to remove the four screws.


## Step 6

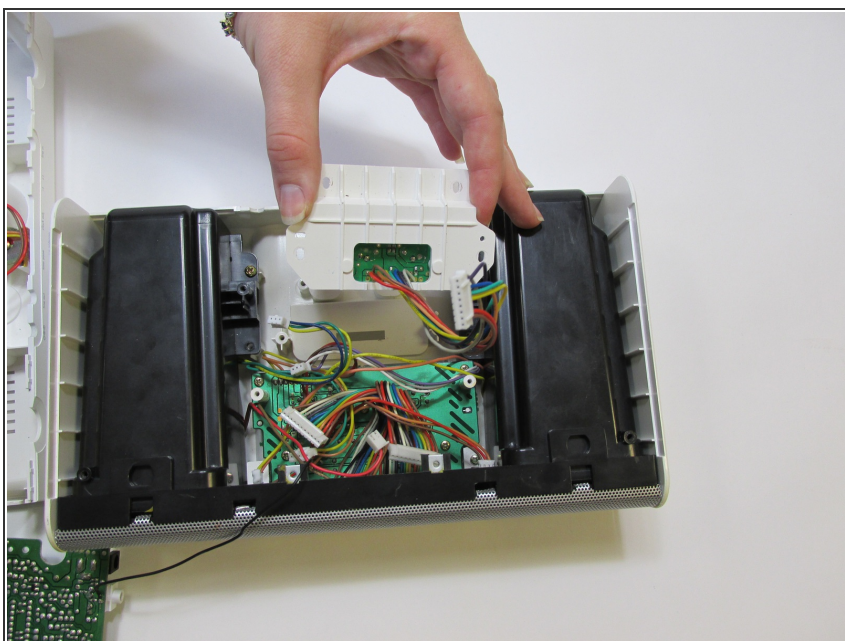

- Gently remove the charging dock from the iHome iH5 by pulling it up.




## Step 7

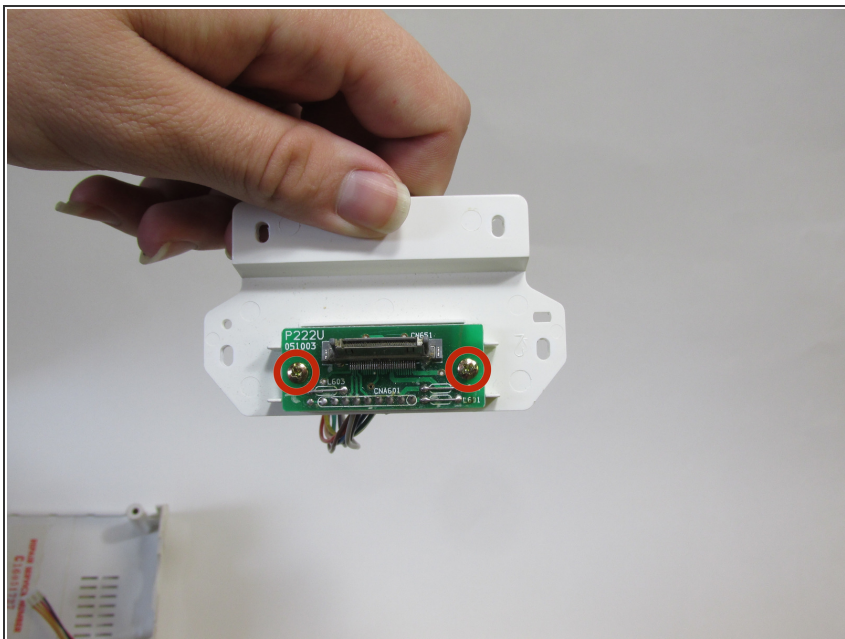

- Remove the final screws connecting the iH5 charging dock to the plastic holding platform
- Use a #2 Phillips screwdriver to remove the 3/8 inch screws.

## Step 8

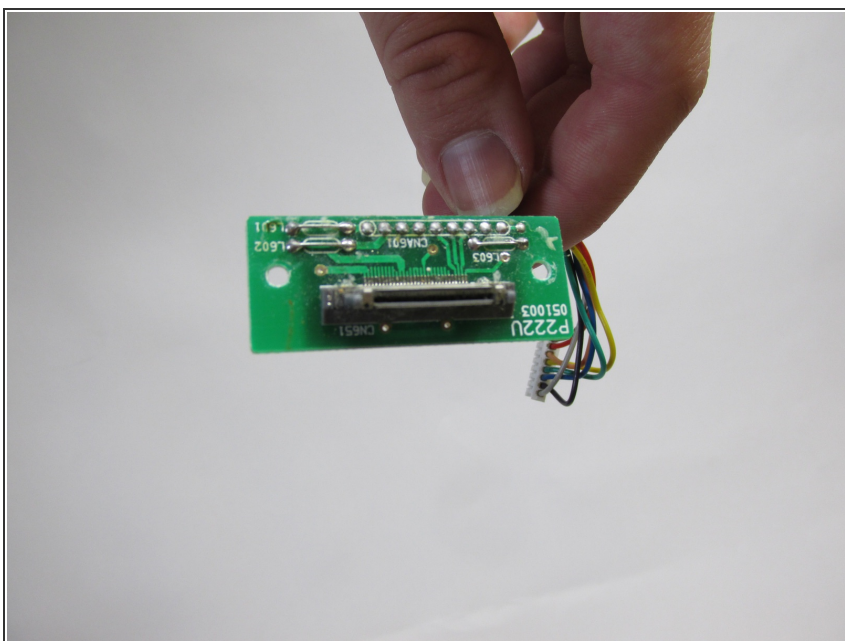

- Replace the old iH5 charging dock with new iH5 charging dock.

To reassemble your device, follow these instructions in reverse order.